

FIG.1

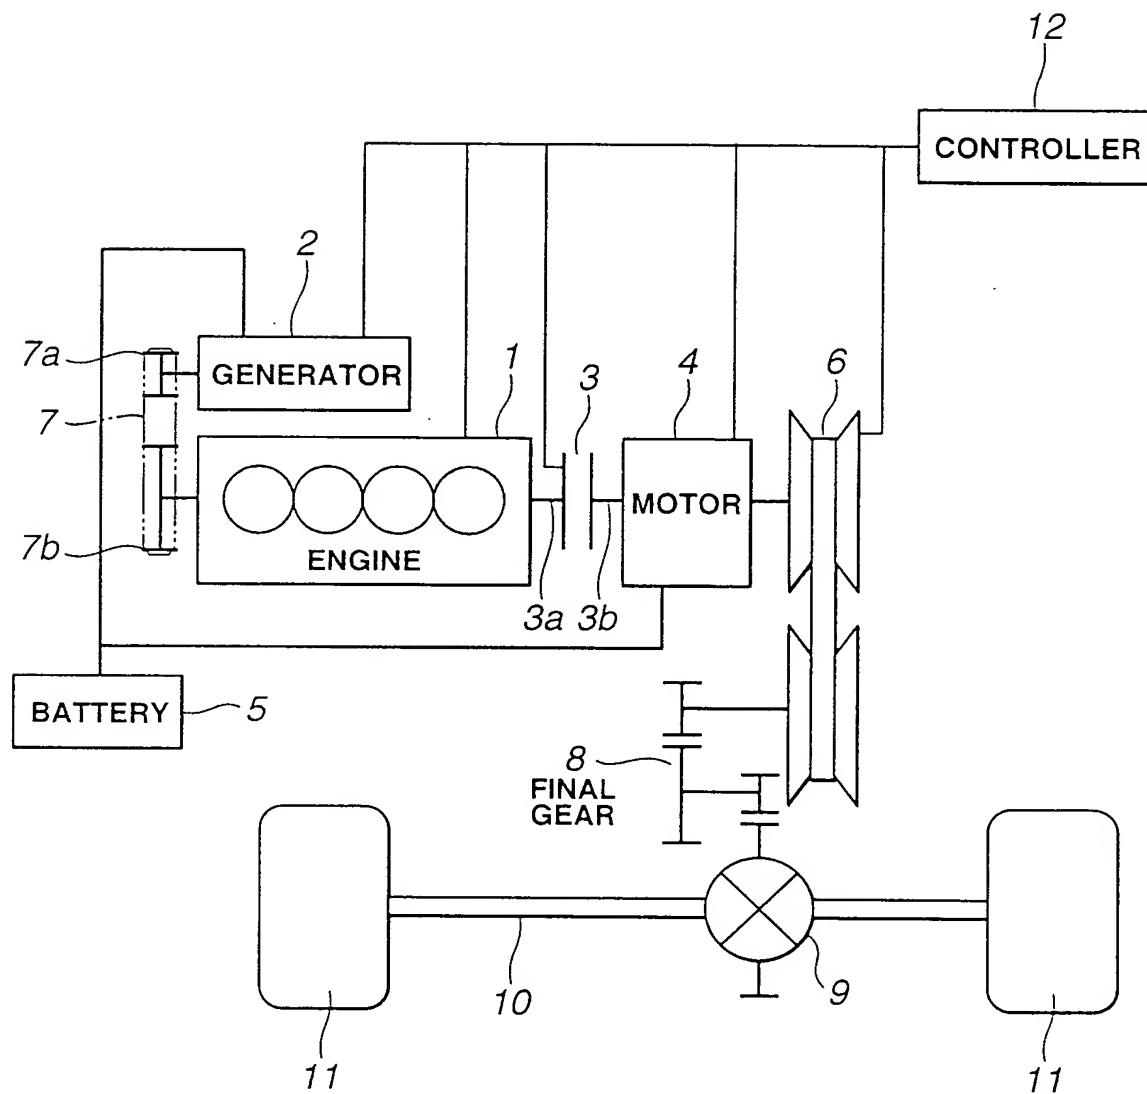


FIG.2

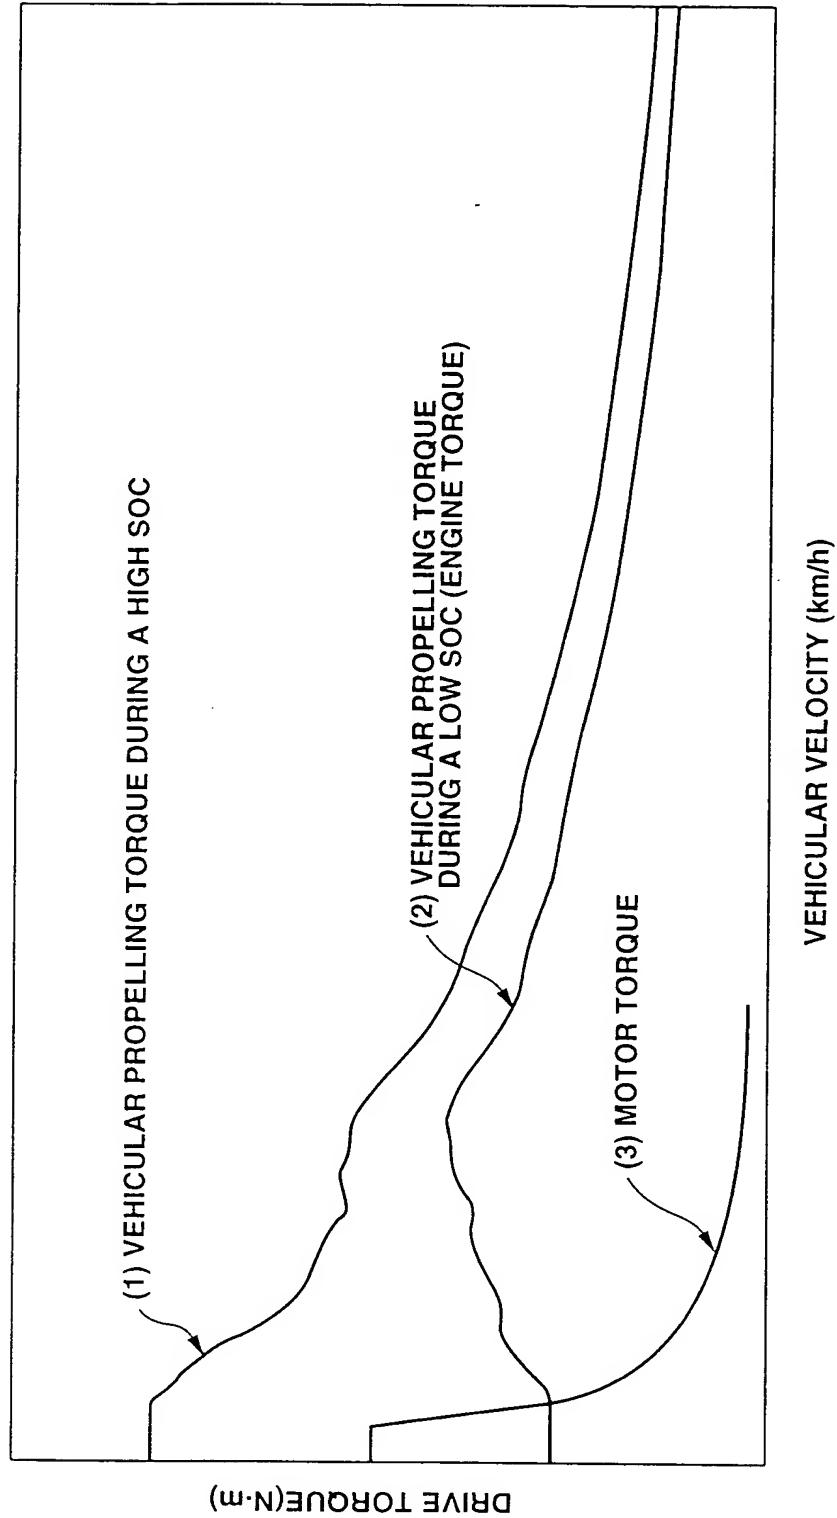


FIG.3A

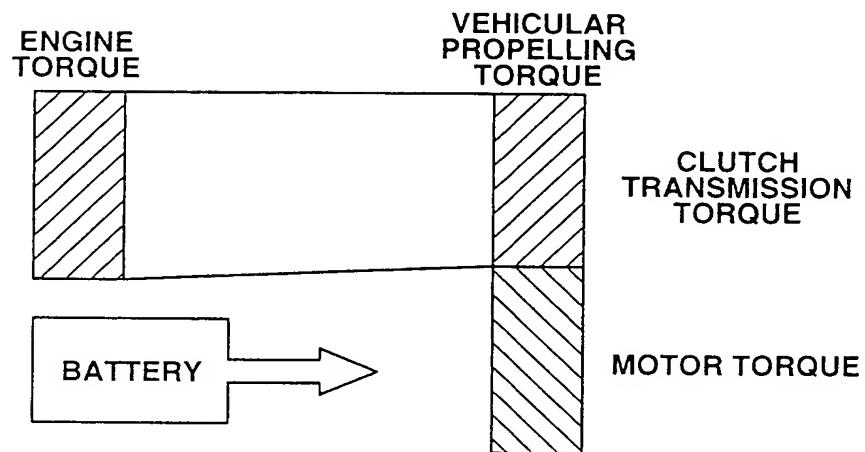


FIG.3B



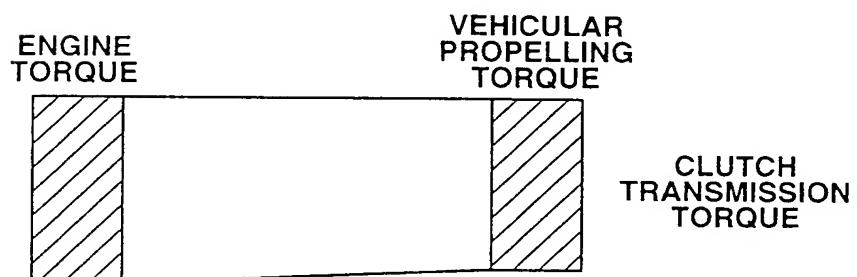


FIG.3C

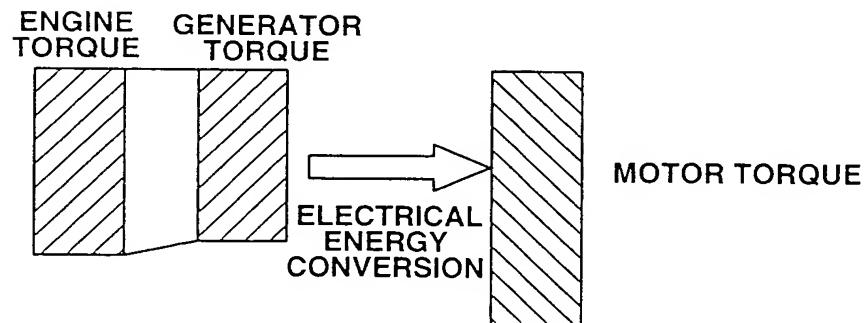

APPARATUS AND METHOD FOR
HYBRID VEHICLE
Inventor(s): Eiji INADA
DOCKET NO.: 023971-0289

FIG.4

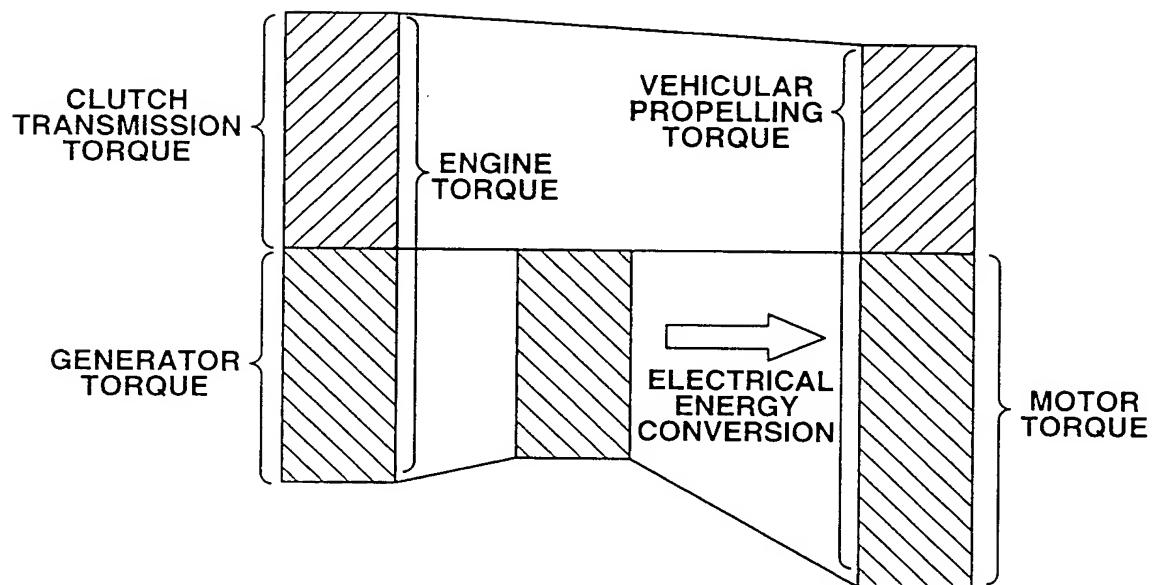

APPARATUS AND METHOD
HYBRID VEHICLE
Inventor(s): Eiji INADA
DOCKET NO.: 023971-0289

FIG.5A
FIG.5B

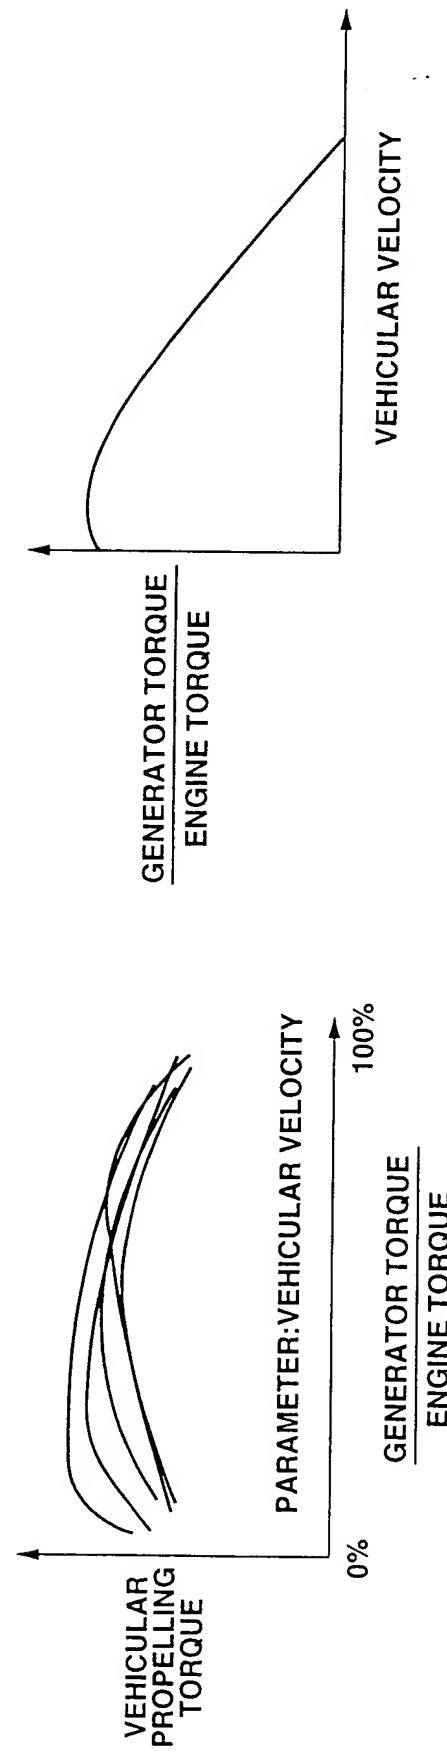


FIG.6A

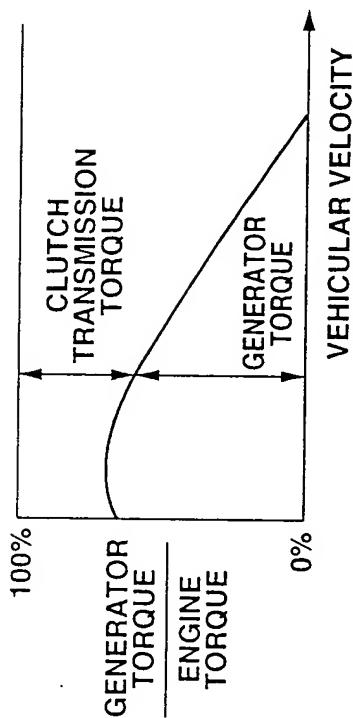


FIG.6C

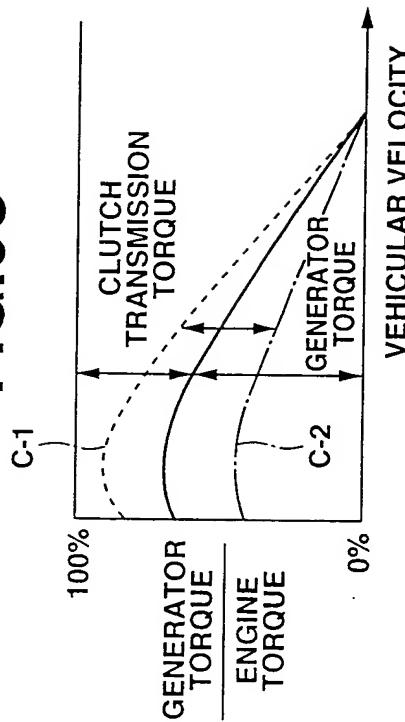


FIG.6B


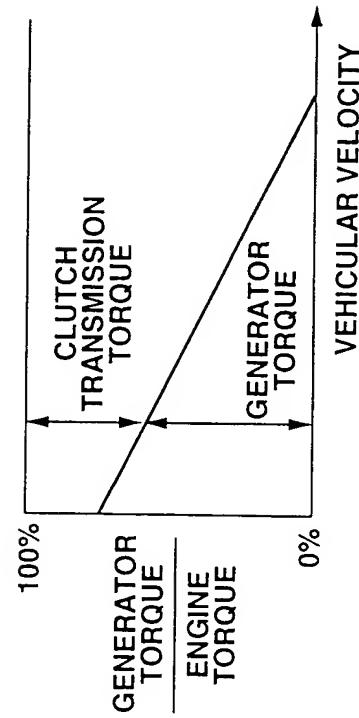


FIG.6D

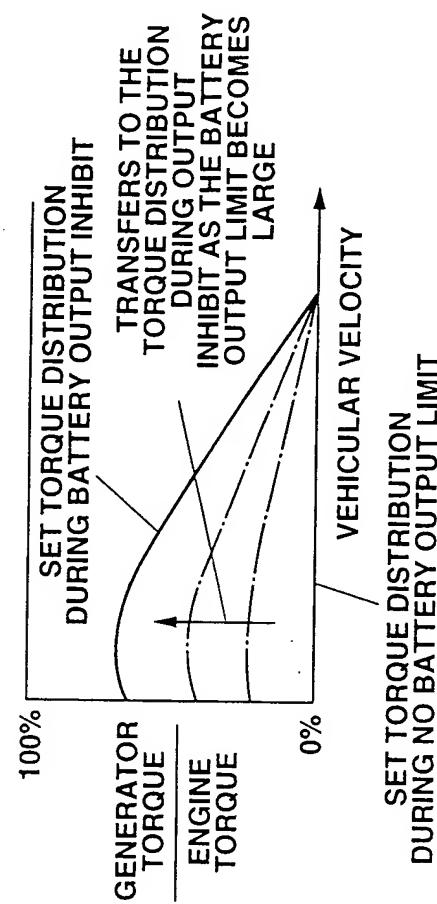

APPARATUS AND METHOD FOR
HYBRID VEHICLE
Inventor(s): Eiji INADA
DOCKET NO.: 023971-0289

THE TORQUE CONTROLLING

FIG.7

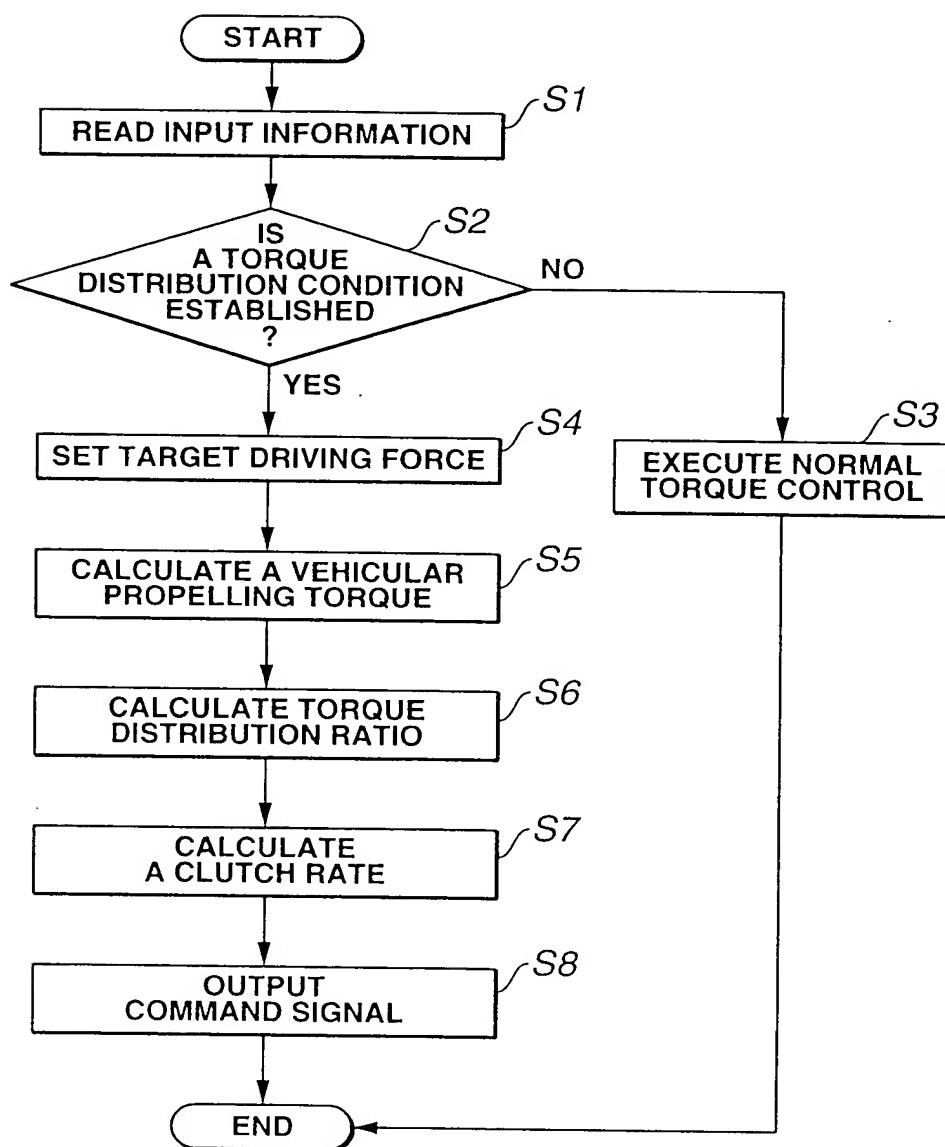


FIG.8A

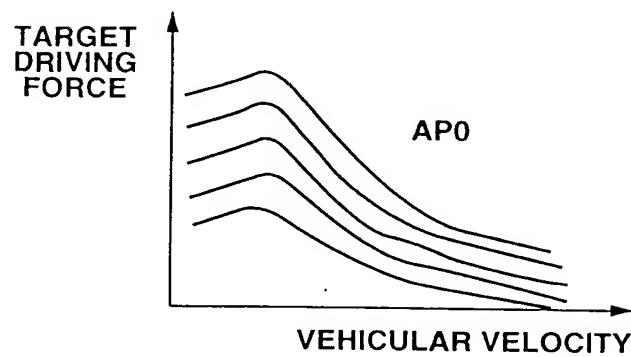


FIG.8B

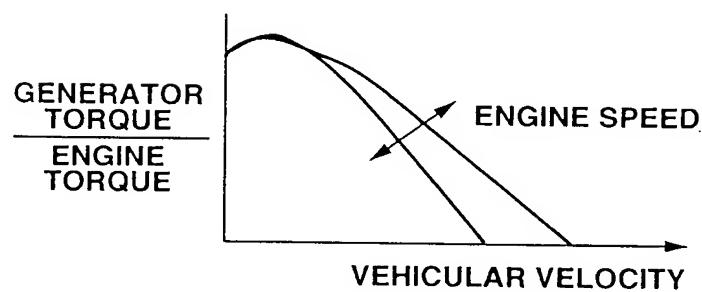


FIG.8C



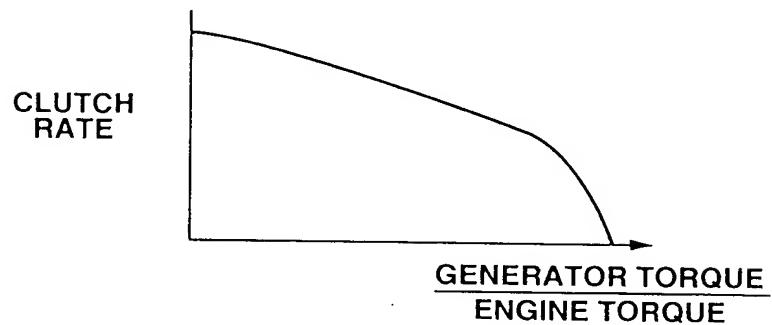


FIG.8D

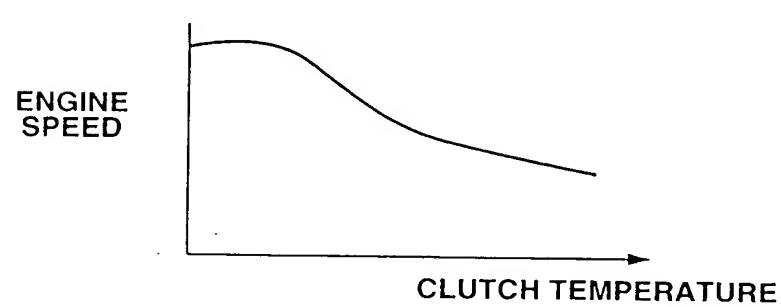


APPARATUS AND METHOD FOR
HYBRID VEHICLE
Inventor(s): Eiji INADA
DOCKET NO.: 023971-0289

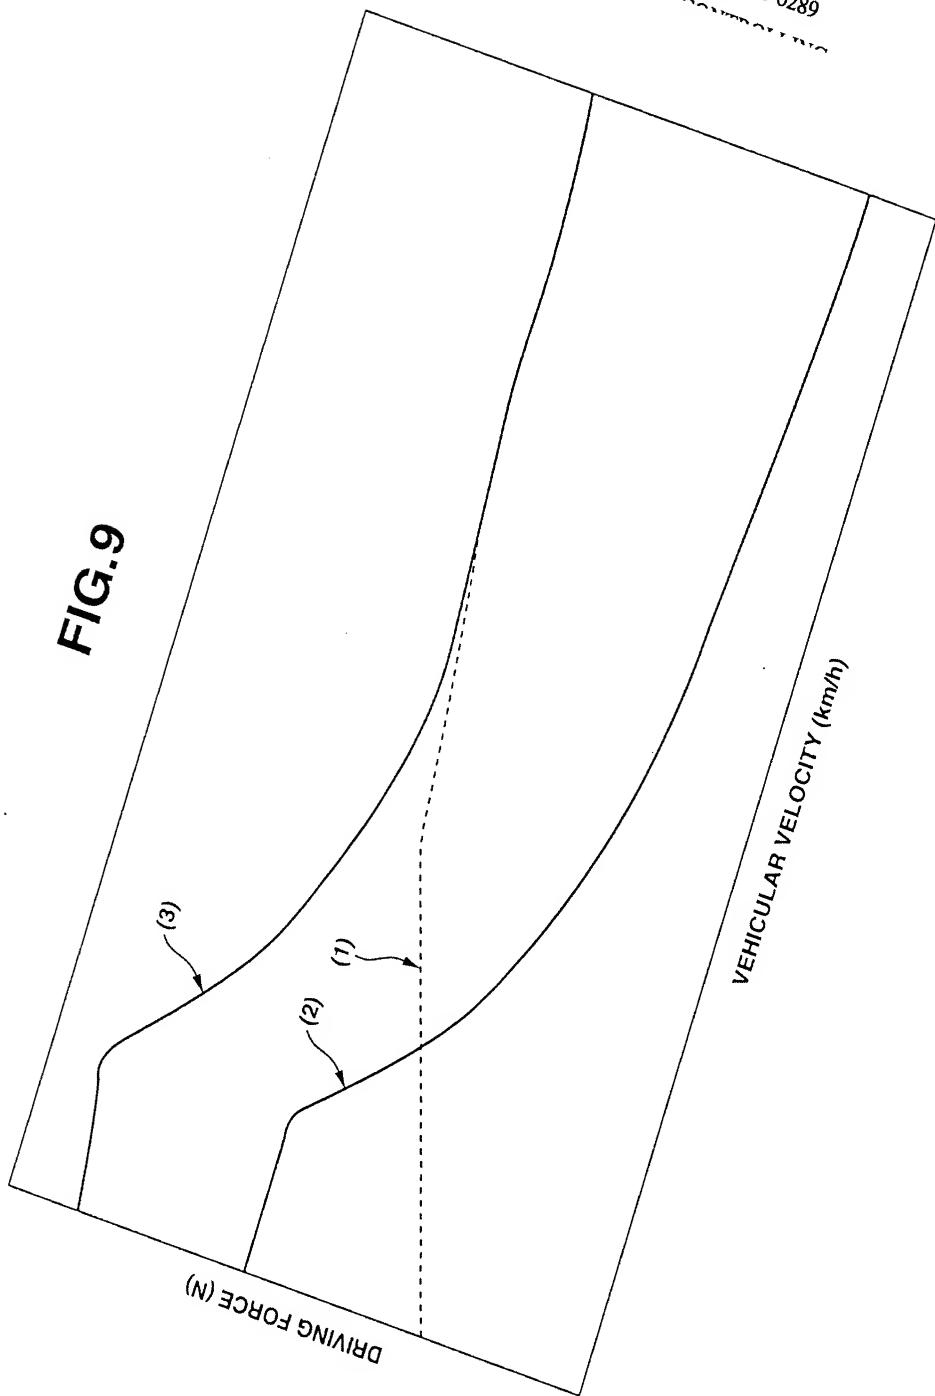

APPARATUS AND METHOD FOR
HYBRID VEHICLE
Inventor(s): Eiji INADA
DOCKET NO.: 023971-0289


FIG.10

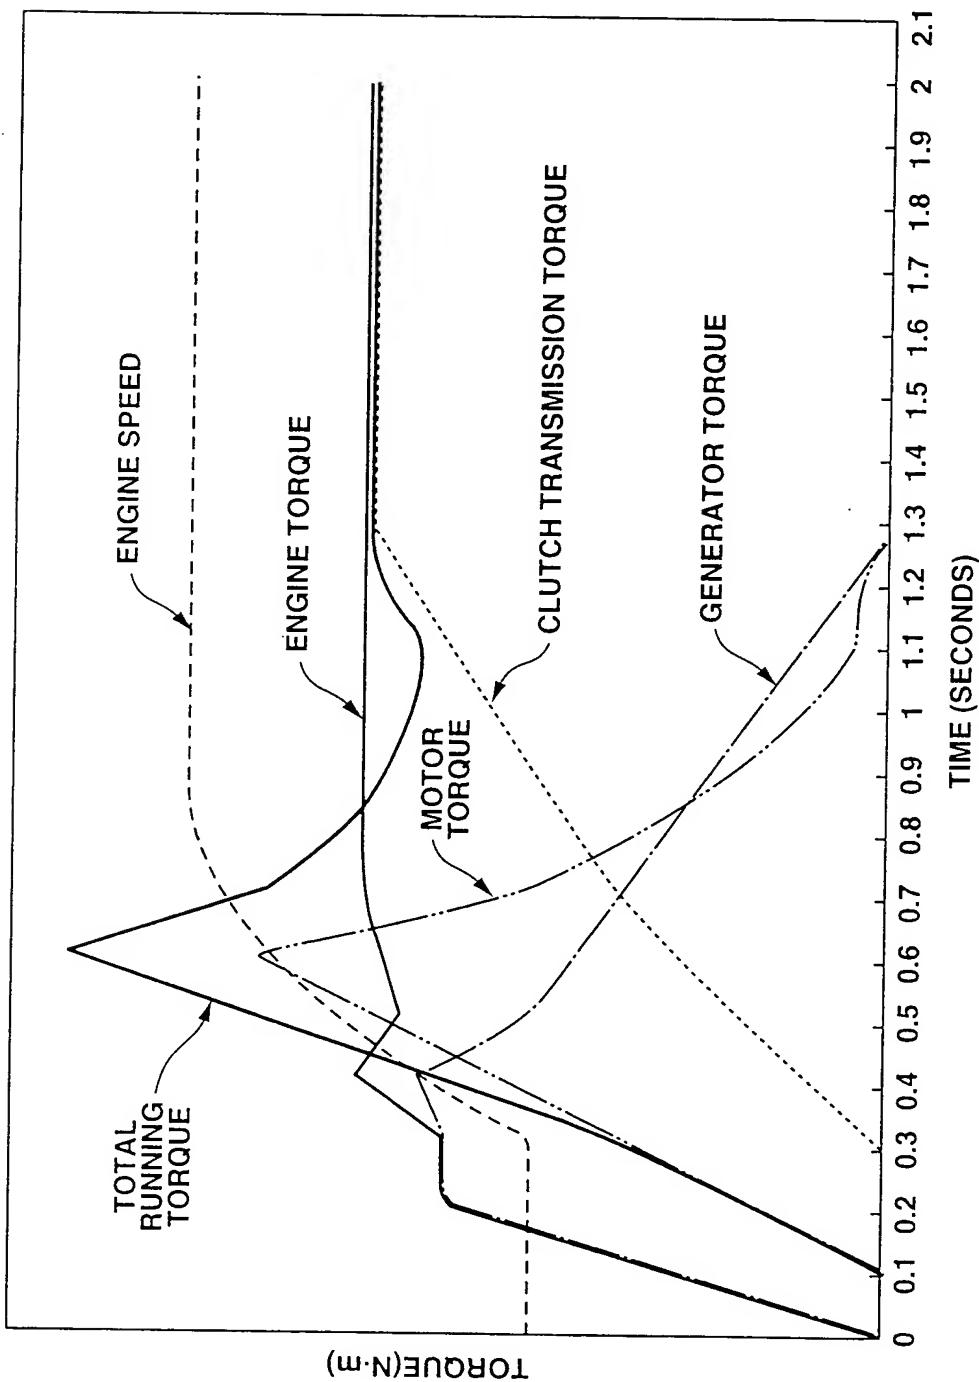

APPARATUS AND METHOD FOR
HYBRID VEHICLE
Inventor(s): Eiji INADA
DOCKET NO.: 023971-0289

FIG. 11 TORQUE CONTROL LOGIC

FIG. 11

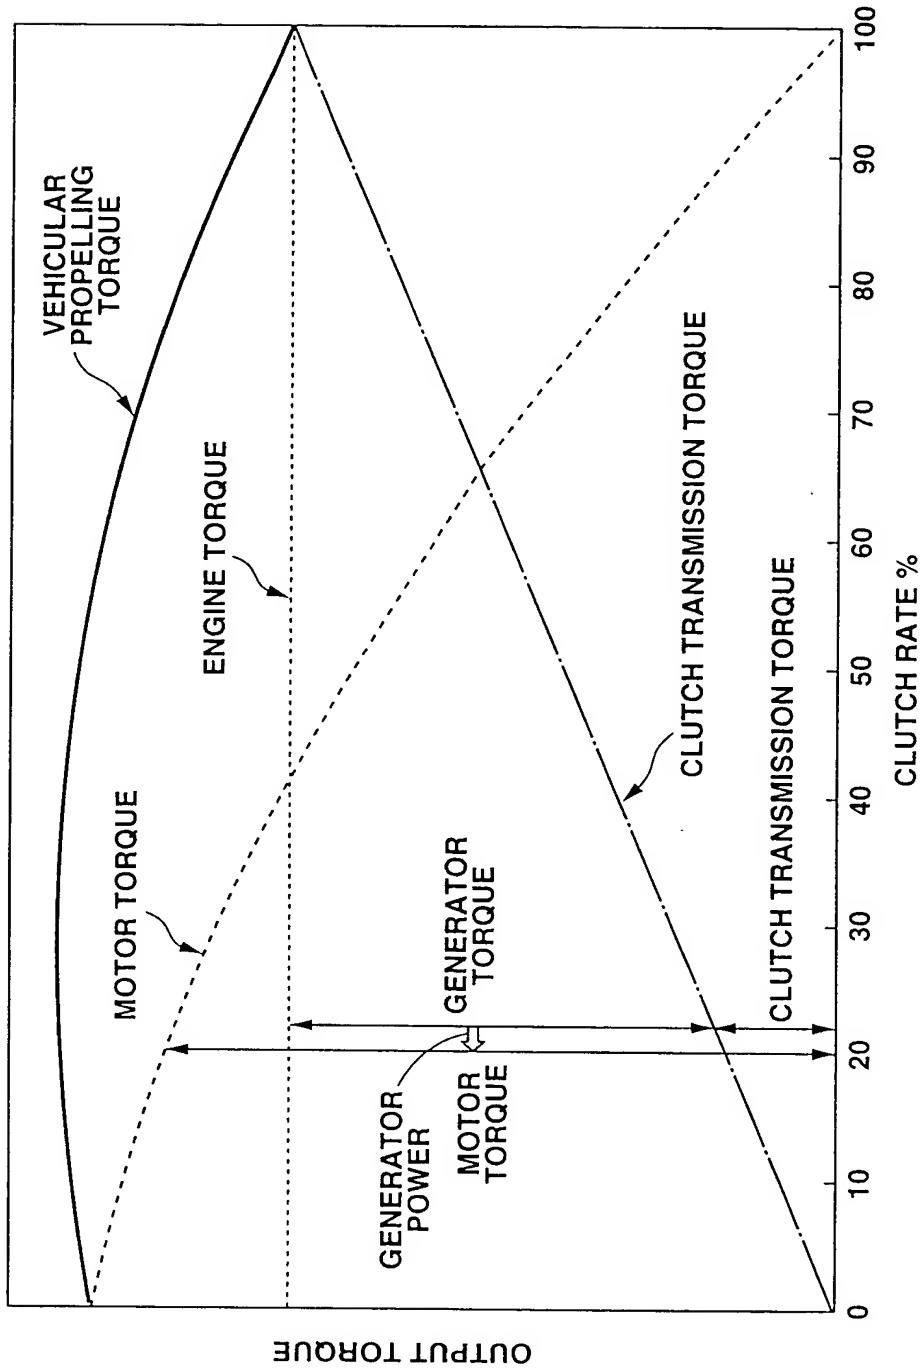

APPARATUS AND METHOD FOR
HYBRID VEHICLE
Inventor(s): Eiji INADA
DOCKET NO.: 023971-0289

FIG. 12 TORQUE CONTROLLING

FIG. 12

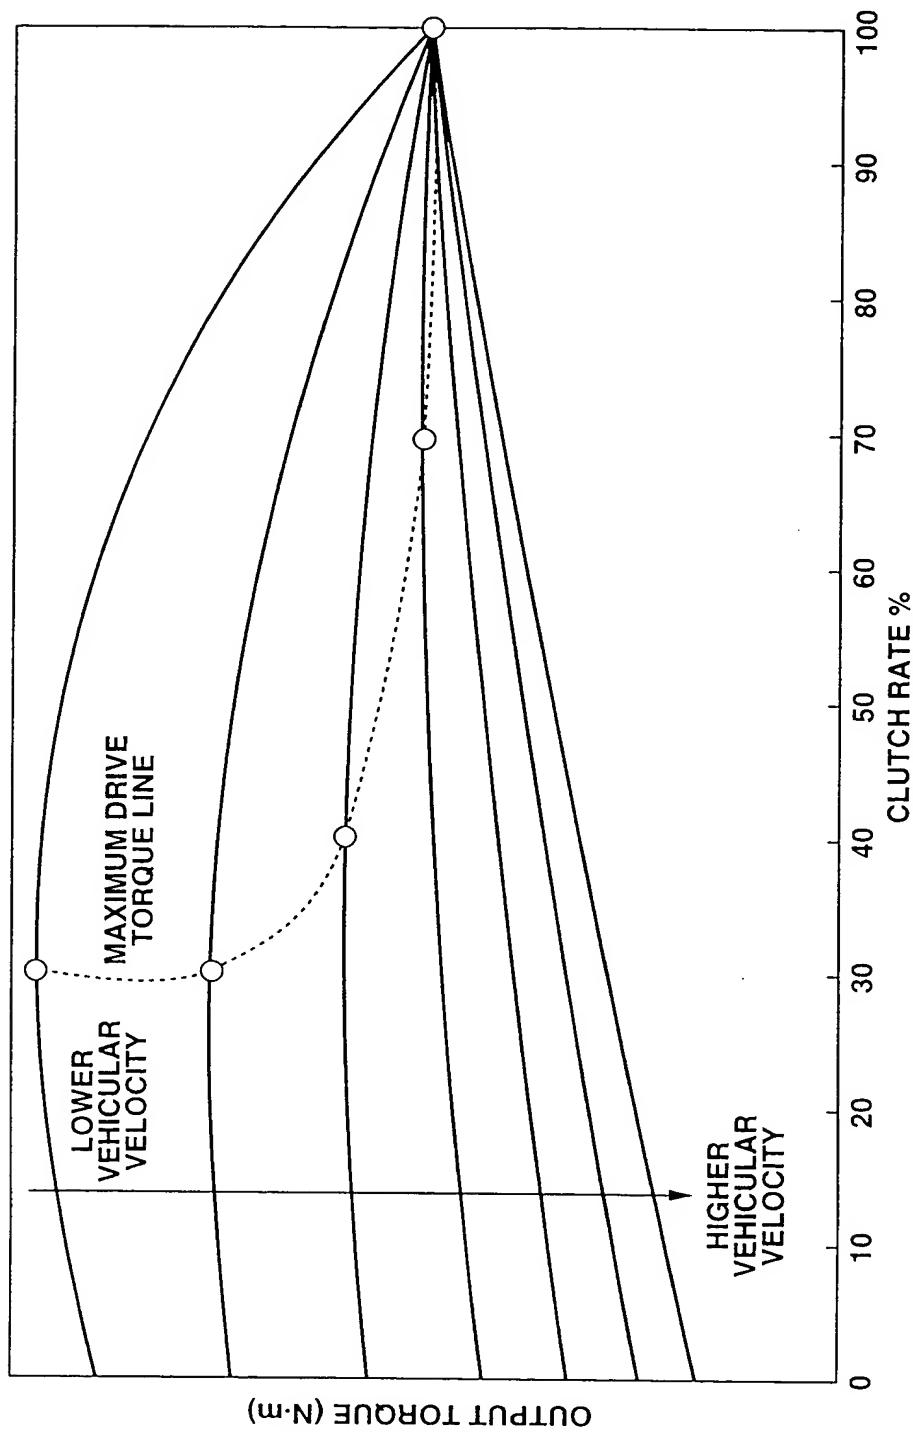


FIG.13A

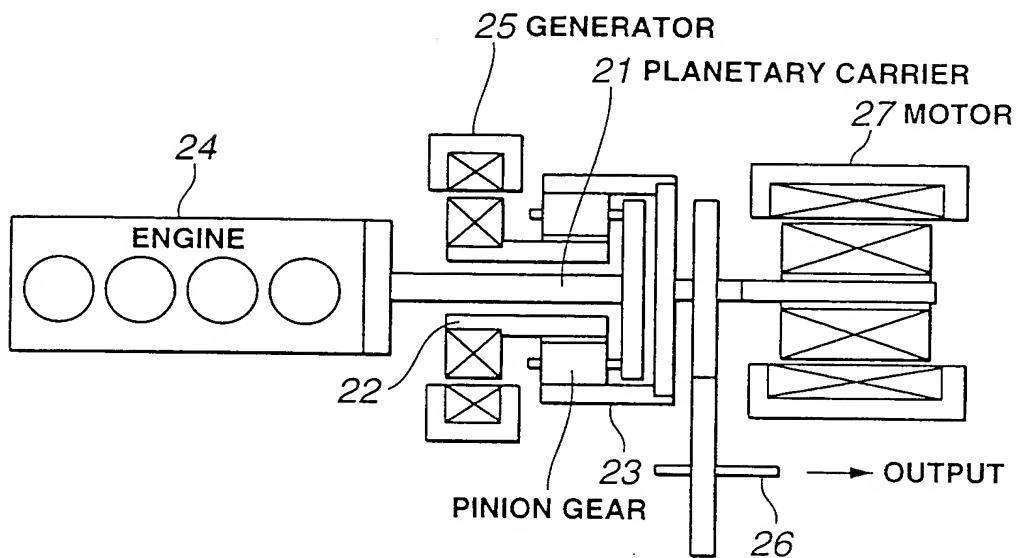


FIG.13B

